

CT18.04

Infrared Radiation Pyrometer CT18.04

for Non-Contact Temperature Measurement

- Rugged stainless steel housing, IP65
- Wide temperature ranges from **200 °C to 2900 °C**
- Very fast response times ≥ 1 ms (programmable)
- Focusable Lens provides Fields-of-View as small as **0.7 mm**
- Laser aims the size of the Field-of-View in focus



GENERAL SPECIFICATION

Temperature ranges:	<ul style="list-style-type: none"> ■ <input type="checkbox"/> 200 °C to 700 °C, <input type="checkbox"/> 250 °C to 1200 °C, <input checked="" type="checkbox"/> 300 °C to 1400 °C, <input type="checkbox"/> 350 °C to 1700 °C, <input type="checkbox"/> 400 °C to 2300 °C, <input type="checkbox"/> 450 °C to 2900 °C
Temperature resolution (NETD):	<ul style="list-style-type: none"> ■ Depends on measured temperature and response time, typical value 0.1 °C (at 100 ms, 350 °C, $\epsilon = 1$)
Accuracy (uncertainty):	<ul style="list-style-type: none"> ■ ± 0.5 °C plus 0.5% of the difference between target and sensor head temperature
Long term stability:	<ul style="list-style-type: none"> ■ Better than 0.01% of the absolute measured value per month
Spectral response:	<ul style="list-style-type: none"> ■ 1.6 μm
Programmable functions via serial interface:	<ul style="list-style-type: none"> ■ Emissivity, environmental temperature, analog output, function of analog output, response time, temperature unit, valley/peak picker with decay function, reset after time, laser function, alarm values and output
Emissivity:	<ul style="list-style-type: none"> ■ 0.050 to 1.000 in 0.001-steps
Response time:	<ul style="list-style-type: none"> ■ From 1 ms to 10 s (0.001, 0.003, 0.01, 0.03, 0.1, 0.3, 1, 3, 10 s)
Temperature unit:	<ul style="list-style-type: none"> ■ °C, K or °F
Analog output (Hardware):	<ul style="list-style-type: none"> ■ Linear 0 - 20 mA or 4 - 20 mA or 0 - 10 V scalable temperature span ≥ 200 °C
Analog output (Functions):	<ul style="list-style-type: none"> ■ Actual value, max-value or min-value
Analog output (Resolution):	<ul style="list-style-type: none"> ■ 16 bit
Valley/peak picker programmable:	<ul style="list-style-type: none"> ■ Reset: internal <input type="checkbox"/> Reset: external input <input type="checkbox"/> Reset: after time (programmable)
Serial interface: (switchable)	<ul style="list-style-type: none"> ■ RS232-interface, bi-directional, 9.6 kbps to 230 kbps and RS485 interface, Half-Duplex or Full-Duplex, 9.6 kbps to 230 kbps For programming and data transfer
Alarm output:	<ul style="list-style-type: none"> <input type="checkbox"/> Programmable dry contact (relay)
Operating voltage:	<ul style="list-style-type: none"> ■ 10 VDC to 30 VDC
Power consumption:	<ul style="list-style-type: none"> ■ Approx. 2.5 W
Permissible ambient temperature:	<ul style="list-style-type: none"> ■ -20 °C to 70 °C <input type="checkbox"/> With protective and cooling housing WK15 up to 300 °C
Storage temperature:	<ul style="list-style-type: none"> ■ -40 °C to 85 °C
Protective class:	<ul style="list-style-type: none"> ■ IP65 (IEC), (NEMA 4 equivalent)
Housing:	<ul style="list-style-type: none"> ■ Stainless steel
PC-based Software:	<ul style="list-style-type: none"> ■ EasyConfig: Software for parameter setting <input type="checkbox"/> EasyMeas: Software for parameter setting, data recording, data storage and data evaluation

<ul style="list-style-type: none"> ■ Standard function <input type="checkbox"/> Option
--

CT18.04

OPTICS

- Objectives (Lenses):** ■ Focusable from 132 mm to infinite
- Field of view diameter:** ■ From \varnothing 0.7 mm, depends on lens
- Field of view marking:** □ Laser built-in: aims the center and the size of the field of view in focus
- Laser function:** ■ Time out or permanent operation, while flashing or continuous marking
- Through the lens view finder:** ■ displays the Field of View of the target

APPLICATION


FIELD OF VIEW DIAGRAM (Example)

Temperature Measurement of:


- Metals
- Metal oxid
- Semiconductors
- Glass
- Graphite
- Silicium
- ...

Prozess Temperatures in:

- Hardening
- Soldering
- Forging
- Induction heating
- Epitaxy
- Casting
- Annealing

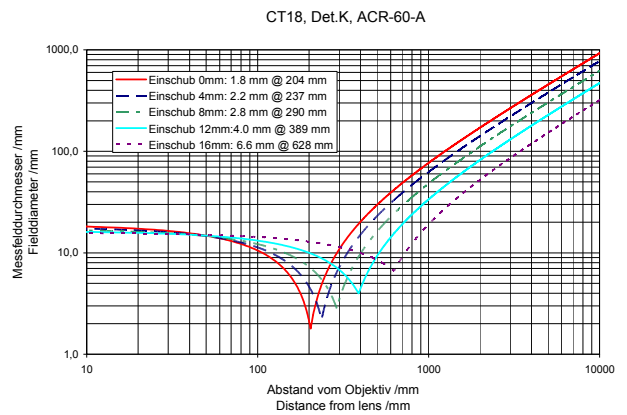

DIMENSIONS

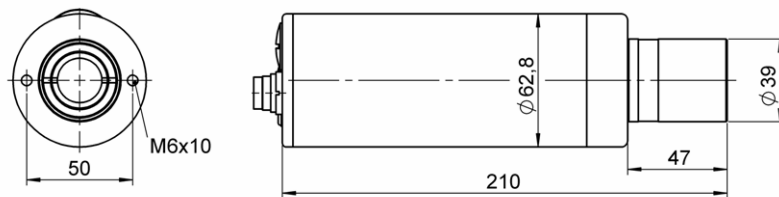

Dimensions in mm

ACCESSORIES



Protective and cooling housing WK15



Protective and cooling housing with air purge and extension tube